


# Fog/Smoke Machines

## V-950 SUPER FOGGER

- Carries TUV/GS safety approval, as well as conforms to E.E.C. product safety standard of "EN-60335".
- Equipped with a "Fail-safe" re-settable thermal cut off switch.
- Accurate electronic temperature control protection.
- Series connection capable.
- Continuous fogging
- Variable fog output selection
- Immediate fogging even during timing operation.
- Wireless capability
- Applications: Stages, Clubs, Haunted Houses, Hay Rides, Professional Lighting Effects

## SPECIFICATIONS

1. Input power: 120V/60HZ
2. Heater: 1300 Watts
3. Fuse type: 120V/13 Amps
4. Tank capacity: 5 liters
5. Warm-up time: Approximately 10 minutes
6. Smoke output: 20,000 cubic feet per minute
7. Unpacked weight: 27 lbs, 12.5 kgs
8. Unit dimensions  
22" (L) x 9½" (W) x 11½" (H) (IN)  
560 (L) x 240 (W) x 400 (H) (MM)
9. Triple timer control
10. Fog duration: Adjustable 1 to 12 second bursts.
11. Fog intervals: Adjustable 10 seconds to 5 minute bursts.
12. Wireless remote, 1 button, no timer (optional).

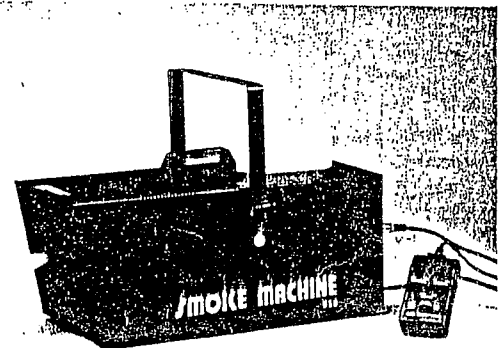

V-950 SUPER FOGGER

## INSTRUCTIONS FOR V-950 SUPER FOGGER

1. Insert remote control into rear of machine.
2. To avoid risk of electric shock, insert line cord plug into grounded outlet only.
3. Fill reservoir with water based Fog Fluid. Use FJ-1 or FJ-1Q ONLY.
4. Close cap tightly. Push clear plastic feeder tube down through the cap (if there is slack).
5. When the indicator light on the controller goes on the machine is ready for use.
6. To use timer mode, press "TIMER" button. Adjust "DURATION" knob for length of fog burst. Adjust "INTERVAL" knob for length of time between fog bursts.
7. Allow fog machine to "COOL DOWN" before packing for transportation.

## IMPORTANT

ALWAYS MAKE SURE THAT THERE IS ENOUGH FOG FLUID IN THE TANK BEFORE TURNING THE FOG MACHINE ON. ACTIVATING THE PUMP WITHOUT FLUID CAN CAUSE DAMAGE TO THE PUMP AND HEAT CORE.

## CAUTION

VAPOR FROM THIS FLUID MAY BE IRRITATING TO SOME PERSONS WITH ALLERGIC SENSITIVITY. DO NOT EXPOSE AT CLOSE RANGE TO KNOWN ASTHMATICS. USE IN A WELL-VENTILATED AREA. TO AVOID INJURY FROM HOT STEAM - KEEP AWAY FROM NOZZLE AT LEAST 2 FEET.

## CLEANING

TO INSURE PROPER CARE AND A TROUBLE FREE LIFE FOR YOUR FOG MACHINE, USE THE FOLLOWING FORMULA 8-12 OZ OF DISTILLED WATER AND 1 TABLESPOON OF WHITE VINEGAR EVERY 2-4 WEEKS.(DEPENDING ON FREQUENCY OF USE.) THIS SHOULD ALLOW FOR A THOROUGH STEAM CLEANSING. FOLLOW THE SAME INSTRUCTIONS AS WITH THE FOG FLUID, KEEP THE BUTTON DEPRESSED FOR 15-30 SECONDS.